Hanging Pictures at VAS

Hanging on Ledge

Hanging Methods

Hanging on Top Row

(Double Row only)

Hook

TYPICAL HOOK

Wire



The VAS preferred method of haging a single row, or bottom row of pictures is to sit the picture on the ledge, and stabilise with L-Hooks.

This method is great for wooden frames, larger than 390mm high. If you have smaller frames or plastic or metal frames, then you may need to use D-Hooks and wire (see separate sheet).

Do not attach L-Hooks prior to hanging day. You will need to do this on hanging day to ensure measurements are correct.

This method is required for everyone with a SINGLE row of pictures, and the bottom row for those with a DOUBLE row.

VAS will supply L-Hooks, a drill, and a measuring tool.

On Hanging Day you will need to drill the holes using the measuring tool and drill, screw in the L-Hooks, and simply hook your frame over the Rail with the base sitting on the Ledge

Hanging on Top Row

This method required only for those with a DOUBLE row of pictures, and for the Top Row only.

You must supply your own hooks, wires, and fit your pictures with D-Rings.

AASPI have a limited number of Hooks for emegencies. VAS will supply a step ladder.

On Hanging Day you will need to ensure your wires are uniform length, and that the drop to the picture is appropriate length.


Assistance

VAS staff will provide the tools and guidance only. So please help each other to avoid stress.

Label your Images

Ledge

Label your images with the image title, your name, and contact details

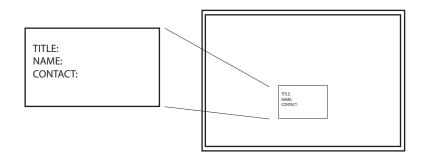

Double Row example

